

BluSeal Leakmaster

Hydrophilic Gun Grade PU Waterstop

Material Description

BluSeal Leakmaster is a unique sealing compound which requires only installation to form a compression seal for in-situ concrete joints.

BluSeal Leakmaster has been designed for sealing various configurations of concrete elements and structures, it is ideal for use in both horizontal and vertical construction joints.

BluSeal Leakmaster is manufactured utilising a specialised single component Polyurethane water swelling resins. This allows the product to be used in major civil engineering project applications and ensures a durable and long-lasting installation.

BluSeal Leakmaster has the structural integrity and the long-term durability to make it suitable for critical infrastructure works. **BluSeal Leakmaster** unique properties allows it to be applied where conventional solid sealants cannot be easily applied. After curing **BluSeal Leakmaster** has excellent physical and water sealing properties.

Characteristics and Benefits

- Easy to install onto rough or smooth surfaces
- Excellent adhesion to concrete
- For both vertical and horizontal applications
- No on-site welding required
- Long term durability
- Can withstand 2 Bar hydrostatic pressure

Areas of Application

- Watertanks
- Basements
- Penetrations, pipes etc
- Shotcrete joints
- Box culverts

Application Specification



BluSeal Leakmaster requires a minimum 50mm cover of concrete from the edge.

Concrete Preparation

1. All defective host substrate must be removed prior to application. Defective material includes cracked or structurally weakened surfaces and chloride contaminated and carbonated concrete.
2. All surfaces must be free of dust, oils and surface contaminants. This may require steam cleaning or high pressure water blasting.

Application

1. Apply **BluSeal Leakmaster** continuously without a break.
2. Placement of the concrete can occur once the contact adhesive has dried, making sure the concrete is properly compacted and vibrated around the **BluSeal Leakmaster**.
3. If the **BluSeal Leakmaster** has been exposed to water prior to the concrete pour, check for pre-expansion. If the product has pre-expanded then remove that section and replace with a new length of **BluSeal Leakmaster**.

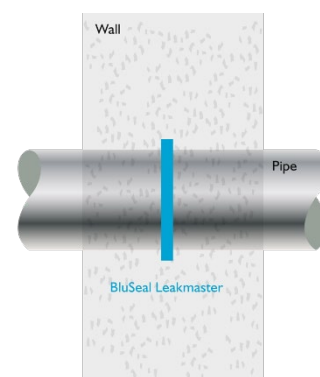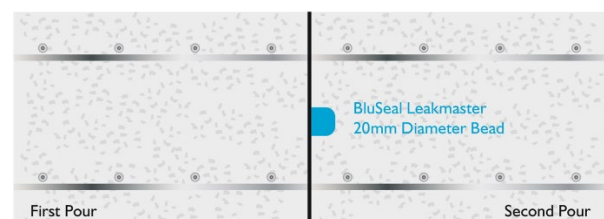

BluSeal Leakmaster

Hydrophilic Gun Grade PU Waterstop

Project Specification Clause

HYDROPHILIC WATERSTOP - The hydrophilic waterstop used for this project shall be a single component liquid applied product that has independent testing to validate the performance outlined in the technical data table on the following pages. BluSeal Supertop manufactured by Bluey Technologies or equivalent shall be accepted.

Performance Data

Tested Characteristic	Standard	Result
Specific Gravity	JIS A 5758	1.23
Extrusion Property	JIS A 5758	3.4 sec @ 23°C
Slump	JIS A 5758	1 mm @ 23°C
Tack Free Time	JIS A 5758	6 hours @ 23°C, 60% R.H.
After Curing		
Hardness	JIS A 6253	A39/s
Tensile Strength	JIS A 6251	5.98MPa
Elongation	JIS A 6251	1140%
After Curing	JIS A 6252	14N/mm
Swelling Properties of Cured Product Immersed in Water*		
Weight Increase Rate		72% @ 15°C - 20°C, 7 days

* Test results for distilled water. Expansion rate can vary in salt or contaminated water.

BluSeal Leakmaster

Hydrophilic Gun Grade PU Waterstop

Disclaimer

BluSeal Leakmaster-ANZ-V1-I02025

This Technical Data Sheet is provided for general information and instruction only. The properties and characteristics set out herein represent typical testing results under laboratory conditions. Results of actual product characteristics may vary slightly. Site-specific and project-specific conditions may affect product performance, including without limitation: surfaces, environmental conditions, contact conditions, storage conditions, storage timeframes, weather, and climatic or seasonal conditions. Not all product parameters are batch tested as part of the manufacturing quality control process, and performance may vary between batches.

If Bluey gives any express written product warranty in relation to the product, that warranty is subject to the foregoing qualifications, despite anything to the contrary in any other document. All other representations, advice, suggestions or promises regarding the product's performance or its implementation, whether verbal or in writing, and whenever given, including in the course of any field services, are expressly disclaimed. Without limiting the foregoing, Bluey will have no liability for loss or damage of any kind if any application specifications are not followed.

The foregoing is not intended to exclude any warranties or guarantees which by law cannot be excluded. Subject only to the foregoing provisions of this Notice, and to the extent permitted by law, Bluey disclaims all liability for loss or damage of any kind suffered as a result of or in connection with the product or its implementation. If such liability cannot be wholly excluded, Bluey's liability will, to the extent permitted by law, be limited to the replacement of the product itself or the direct cost of replacement of the product itself (not including any collateral or consequential loss or damage of any kind).

Bluey Technologies Pty Ltd

ABN 36 115 613 646
Suite 102, 2 Burbank Place
Norwest NSW 2153

Freecall: 1300 227 300
www.bluey.com.au

Emergency Advice

1300 954 583 within Australia (24hr)